


# LAN Transformer


10/100 BASE-TX P20602 G

REV: 0


## A. MECHANICAL(unit:mm)

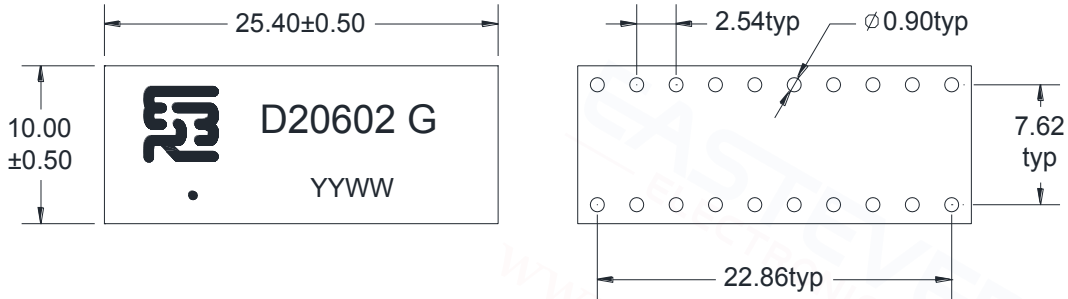

### Suggested PAD Layout

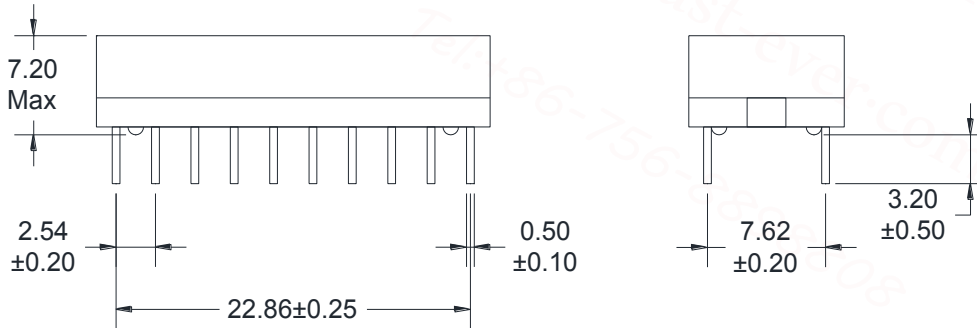

## B. SCHEMATICS

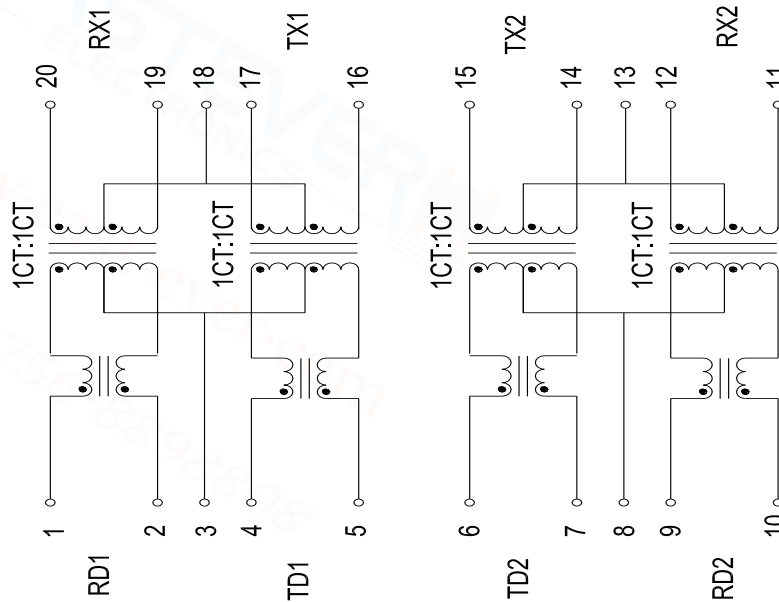

# LAN Transformer

10/100 BASE-TX P20602 G

REV: 0

## C. ELECTRICAL SPECIFICATIONS @25°C


1. OCL: 350uH Min @ 100 KHz, 0.1V with 8mA DC BIAS
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 1400mΩ Max
4. Turns Ratio: 1CT:1CT±5%
5. Insertion Loss: -1.1 dB Max @ 1-100 MHz
6. Return Loss: -18 dB Min @ 1-30 MHz  
-14.4 dB Min @ 40 MHz  
-13.1 dB Min @ 50 MHz  
-12 dB Min @ 60-80 MHz
7. Cross Talk: -30 dB Min @ 1-100 MHz
8. Common Mode Rejection: -30 dB Min @ 1-100 MHz
9. Isolation Hipot: 1500VAC 1mA 60S
10. Operating temperature 0°C to +70°C
11. Storage temperature -20°C to +125°C

## D. PACKAGE INFORMATION


Package Quantity:

One Tube=20Pcs

One Carton=20\*320=6400Pcs

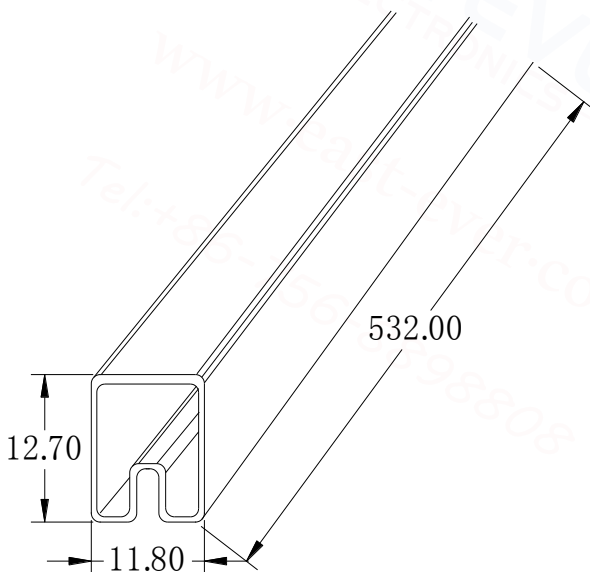

Tube:532.00\*11.80\*12.70mm

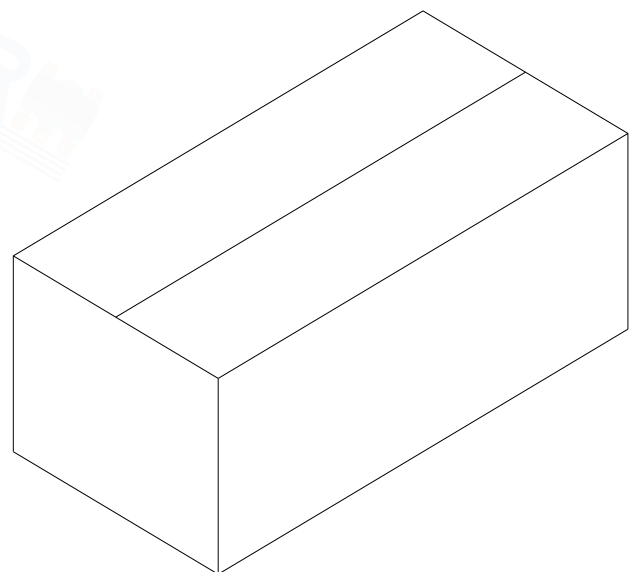

Carton: L550\*W240\*H210mm